


Crab Bay

Projects designed by Debby Kratovil
for Blank Quilting

Table Runner
Finished Size:
20" x 52"



Totes
Finished Size:
16" x 19"

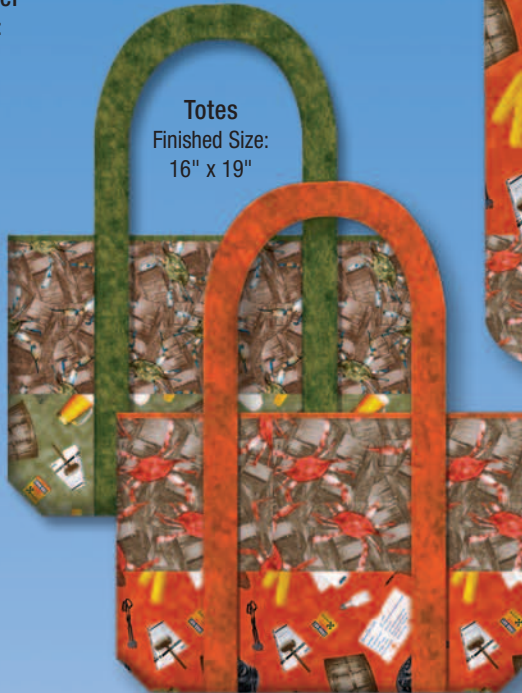

Adult Bibs
Finished Size: 14" x 28"



Placemats
Finished Size: 12" x 18"



TM

2 Bridge Street, Suite 220, Irvington, NY 10533
Toll Free: 888-442-5265 • Fax 914-478-4278
www.BlankQuilting.com

Crab Bay Adult Bib

Designed by Debby Kratovil

Finished Size: 14" x 28"

All seam allowances are 1/4". Please read all directions before beginning and press carefully after each step.

Fabric Requirements:

Red Version:

Fabric A: 1/2 yd 5512 Red

Fabric B: 1/2 yd 5510 Red

Fabric C: 1/4 yd 5511 Red

Fabric D: 1/4 yd 3504 Cayenne

Olive Version:

Fabric A: 1/2 yd 5512 Olive

Fabric B: 1/2 yd 5510 Blue

Fabric C: 1/4 yd 5511 Blue

Fabric D: 1/4 yd 3504 Malibu

Cutting & Assembly:

1. Cut two rectangles 14" x 28" each from both Fabric A and Fabric B. These are the bib front (Fabric A) and back (Fabric B).
2. Cut one 6" x 14" from Fabric C and one 6" x 14" Fabric D for the crumb catcher. Seam these together along one long edge and fold along seam to form the crumb catcher measuring 5-3/4" x 14".
3. Transfer markings of Bib Top and Crumb Catcher to template material or freezer paper, cutting out full size (Templates are half-width needed). Cut out (seam allowances are included in templates).
4. Use the Bib Top Template piece to cut away the neck sections and the Crumb Catcher Template to trim the bottom edges of the two rectangles. (Diagram 1) Do not cut away the neck opening/hole yet. Cut the back of the neck where indicated. Diagram 2 shows the trimmed rectangles.

Cutting & Assembly continued on next page.

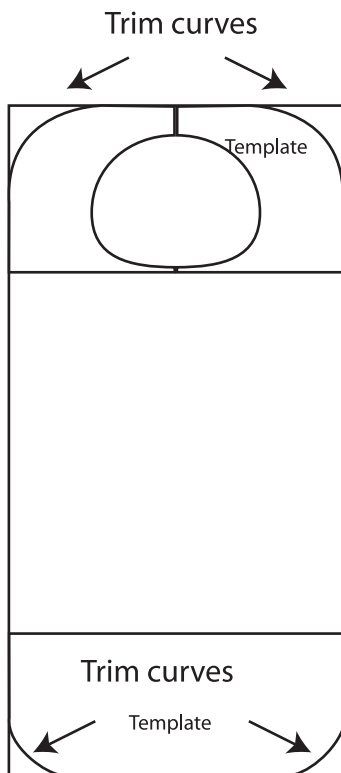


Diagram 1

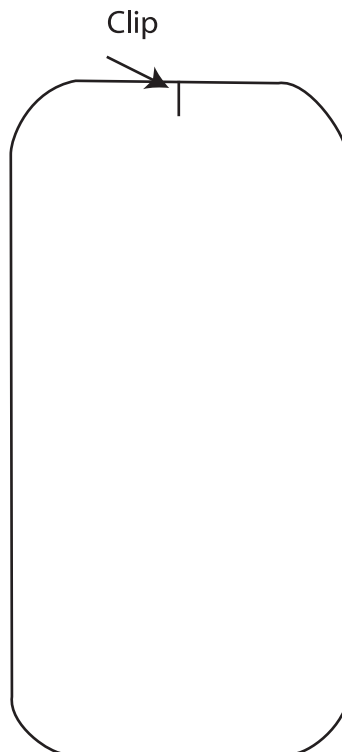


Diagram 2

Adult Bib Cutting & Assembly (continued):

5. Use template provided to trim the bottom edges of the folded crumb catcher. Keep fabric folded in half.
6. Place the crumb catcher along the bottom of the Bib front with Fabric C of the crumb catcher showing and secure with pins along the sides and bottom. Put the bib back right side down on the bib front, aligning all edges. Pin in place. Sew 1/4" seam around the outer edge, catching the Crumb Catcher in the seams.
7. Turn bib right side out and press well (Diagram 3). Transfer the markings of the neck hole from the Bib Top Template and cut away the neck opening
8. Cut a 2-1/4" x 25" bias strip for binding. Fold in half and bind the neck opening (Diagram 4). Turn under the short ends at the back of the neck and slip stitch closed.
9. Sew a velcro fastener or large snap to the back neck opening.

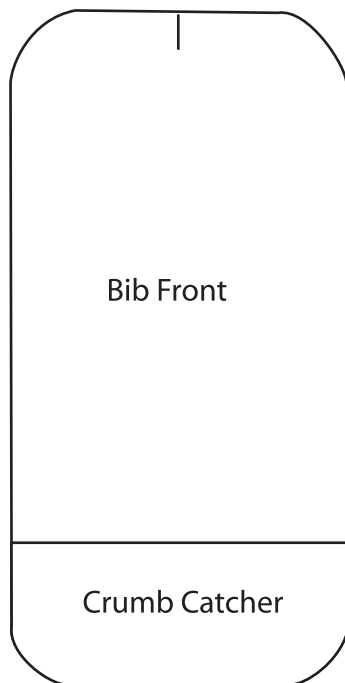


Diagram 3


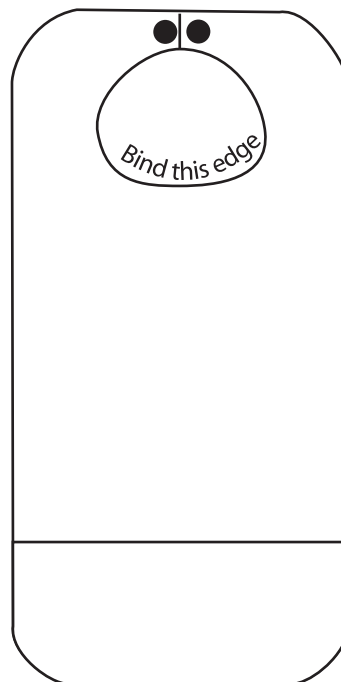


Diagram 4


Crab Bay Adult Bib

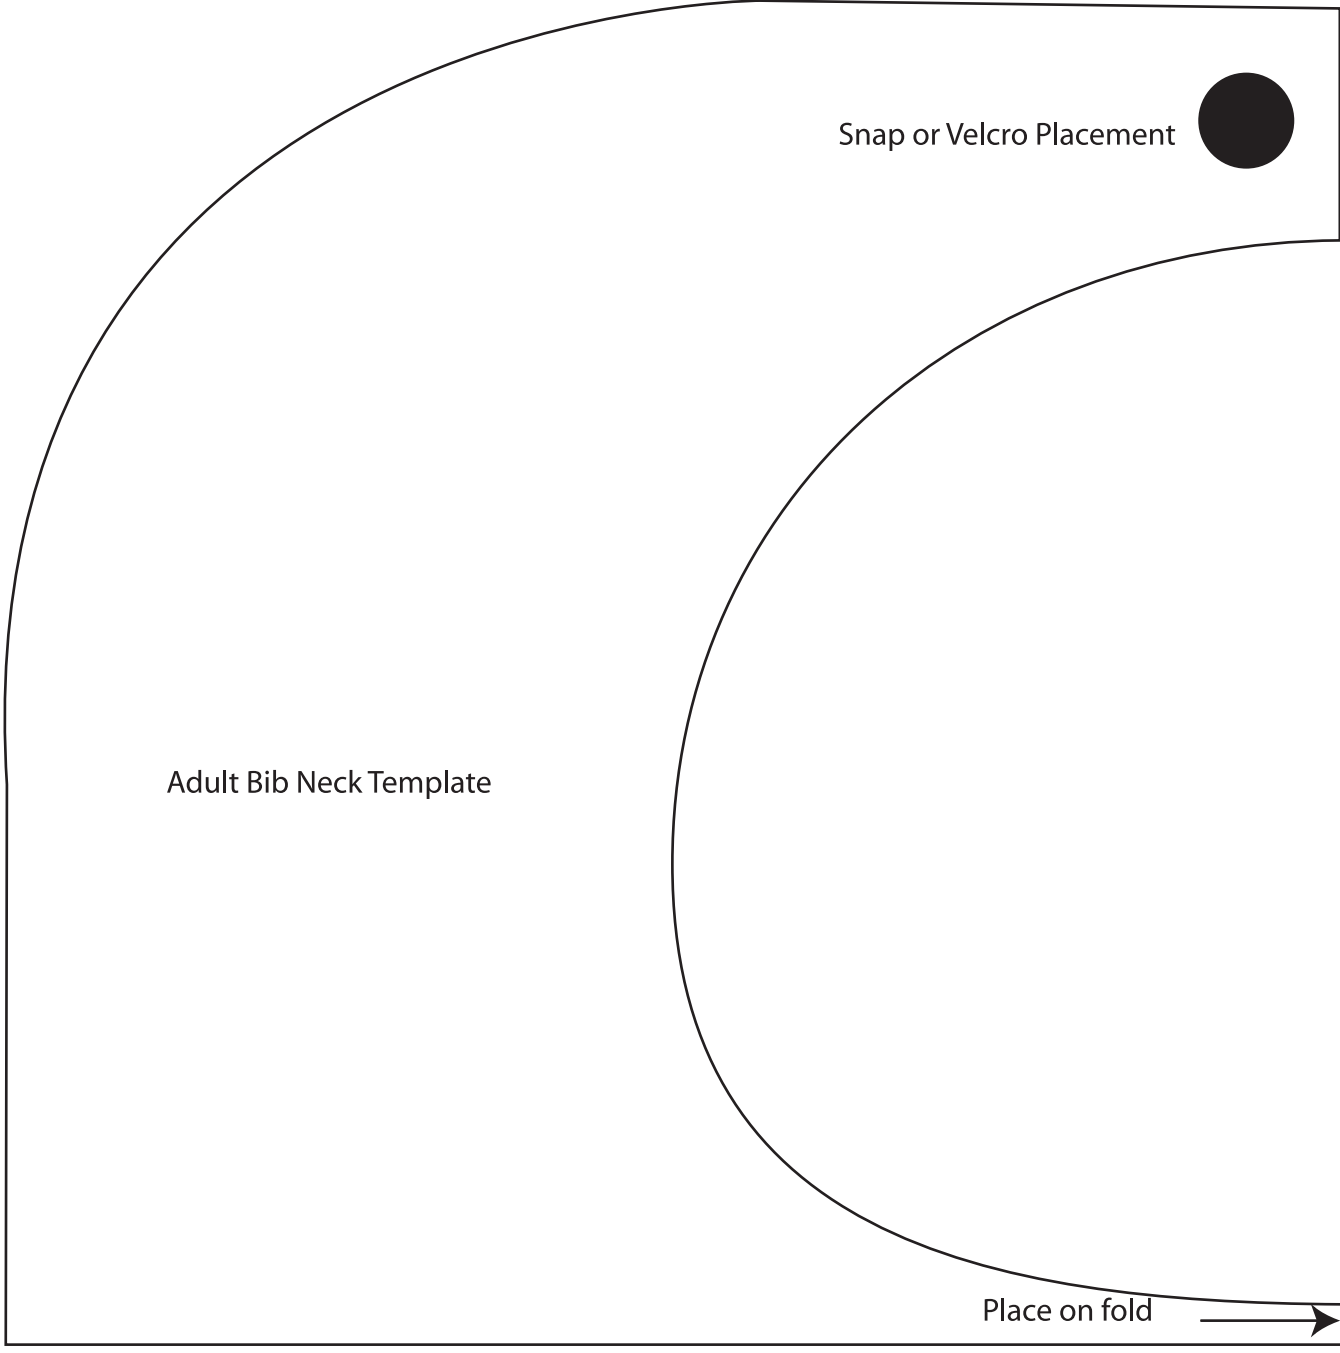


Adult Bib Neck Template

Snap or Velcro Placement

Place on fold



Crab Bay Adult Bib

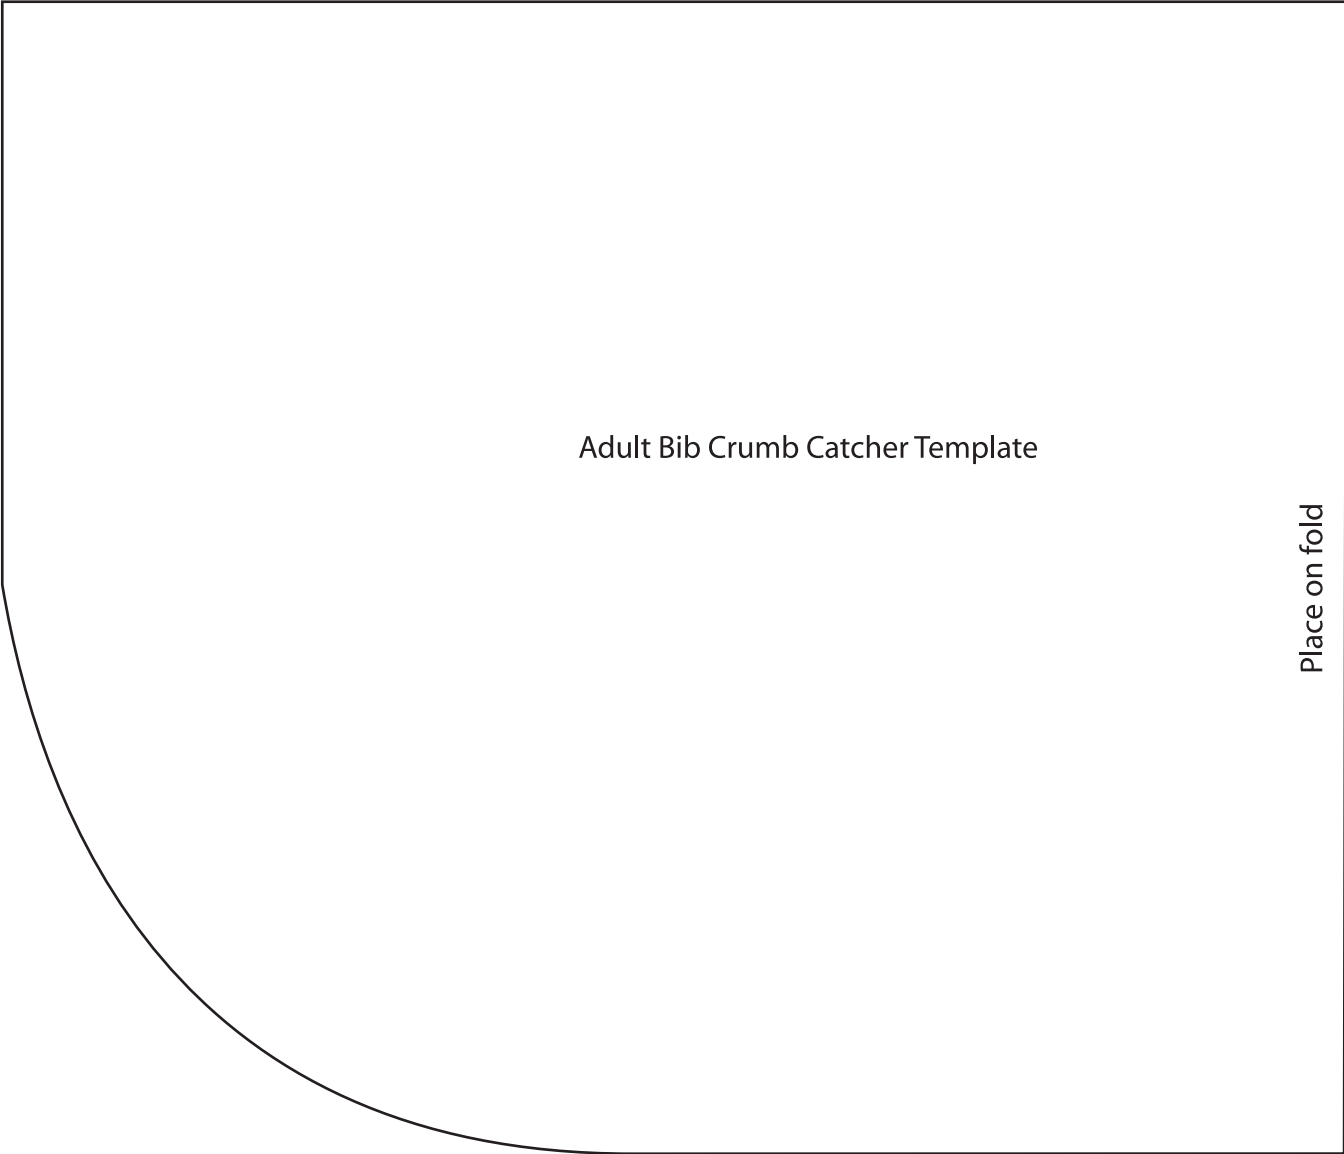

Crab Bay Placemats

Designed by Debby Kratovil

Finished Size: 12" x 18"

All seam allowances are 1/4". Please read all directions before beginning and press carefully after each step.

Fabric Requirements:

Red Version:

Fabric A: 1/2 yd 5510 Red

Fabric B: 1/3 yd 3504 Cayenne

Fabric C: 1/4 yd 3955 Jet

Fabric D: 1/2 yd 5512 Red

Thread for appliqué to match Fabric C

1/3 yd double-sided fusible web

Two batting pieces: 16" x 22"

Olive Version:

Fabric A: 1/2 yd 5510 Blue

Fabric B: 1/3 yd 3504 Palm

Fabric C: 1/4 yd 3504 Malibu

Fabric D: 1/2 yd 5512 Olive


Thread for appliqué to match Fabric C

1/3 yd double-sided fusible web

Two batting pieces: 16" x 22"


Cutting & Assembly:

1. Cut one rectangle 12-1/2" x 14-1/2" from Fabric A. Cut two 3-1/2" x 12-1/2" strips from Fabric B. Cut two rectangles 9-1/2" x 12-1/2" from Fabric C (for crab appliqués).
2. Transfer markings of Crab Appliqué template to template material and cut out full size. For hand appliqué, add seam allowance. For raw edge machine appliqué, no seam allowance is needed. For raw edge appliqué, transfer the fusible web to the wrong side of the two Fabric C rectangles and allow to cool. Use the Crab Appliqué template and cut out two crabs.
3. Center a Fabric C crab appliqué on a Fabric A rectangle and fuse in place. Using the matching thread and your preferred sewing machine stitch, appliqué the crab to the background rectangle.
4. Sew a Fabric B strip to each short end of the Fabric A rectangle. Press well. See the Placemat Assembly Diagram.
5. Cut a 16" x 22" Fabric D backing for the each placemat.
6. Layer the placemat top, the batting and Fabric D backing. Quilt as desired.
7. Cut four Fabric B strips 2-1/4" x wof (two strips for each placemat) and seam together to create a long strip for binding. Bind the placemats.

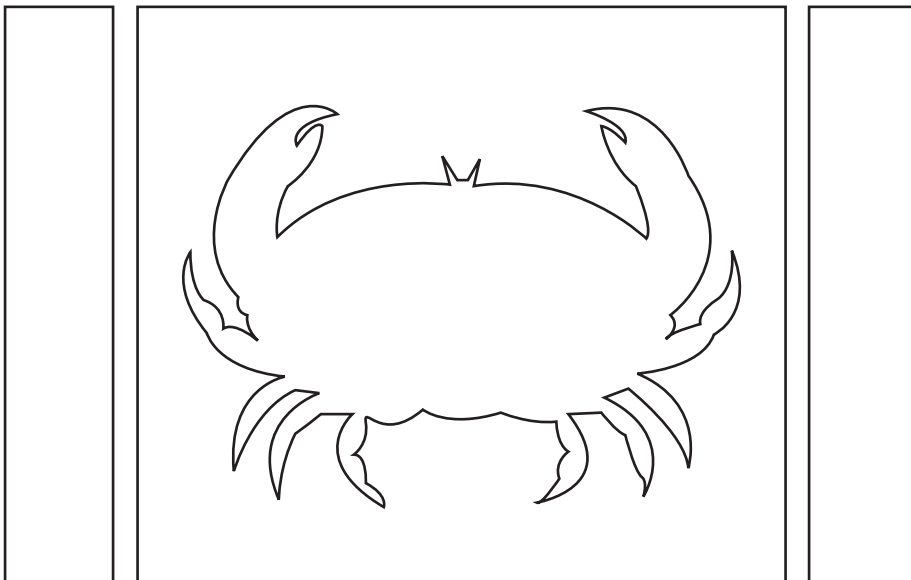

Placemat Assembly Diagram

Crab Bay Placemats

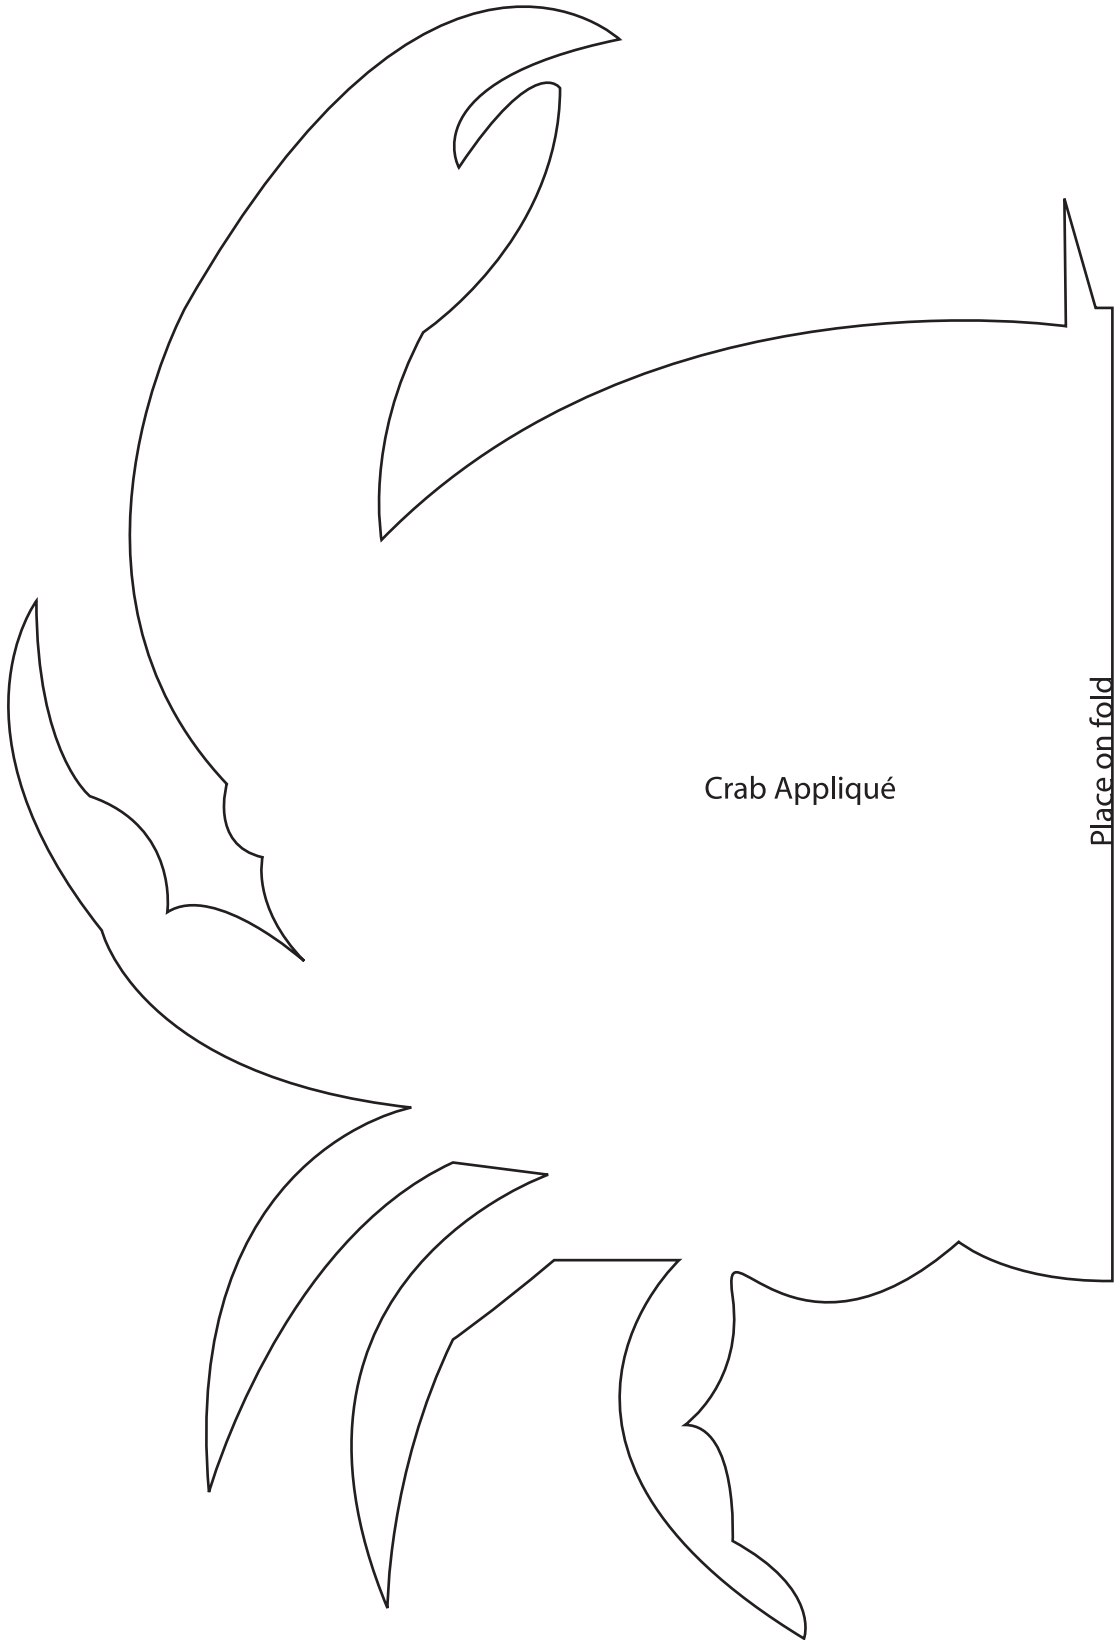

Crab Bay Table Runner

Designed by Debby Kratovil

Finished Size: 20" x 52"

All seam allowances are 1/4". Please read all directions before beginning and press carefully after each step.

Fabric Requirements:

Red Version:

Fabric A: 1/2 yd 5512 Red

Fabric B: 1-1/4 yd 5510 Red

Fabric C: 1/2 yd 3504 Cocoa

Fabric D: 1/2 yd 3504 Citron

Fabric E: 1/3 yd 3955 Jet

Thread for appliqué to match Fabric E

1/3 yd double-sided fusible web

24" x 56" piece of batting

Olive Version:

Fabric A: 1/2 yd 5512 Olive

Fabric B: 1-1/4 yd 5510 Blue

Fabric C: 1/2 yd 3504 Palm

Fabric D: 1/2 yd 3504 Citron

Fabric E: 1/3 yd 3504 Malibu

Thread for appliqué to match Fabric E

1/3 yd double-sided fusible web

24" x 56" piece of batting

Cutting & Assembly:

1. Cut one rectangle 14-1/2" x 30-1/2" from Fabric A. Cut two 3-1/2" x 30-1/2" strips from Fabric C. Cut two 11-1/2" x 20-1/2" rectangles from Fabric D and two rectangles 9-1/2" x 12-1/2" from Fabric E (for crab appliqués).
2. Transfer markings of Crab Appliqué template to template material and cut out full size. For hand appliqué, add seam allowance. For raw edge machine appliqué, no seam allowance is needed. For raw edge appliqué, transfer the fusible web to the wrong side of the two Fabric E rectangles and allow to cool. Use the Crab Appliqué template and cut out two crabs.
3. Center a Fabric E crab appliqué on a Fabric D rectangle and fuse in place. Using the matching thread and your preferred sewing machine stitch, appliqué the crab to the background rectangle.
4. Sew a Fabric C strip to each long end of the Fabric A rectangle. Join a crab appliqué rectangle to each short end. Press well.
5. Cut and piece a 22" x 56" Fabric B backing for the table runner.
6. Layer the table runner top, the batting and Fabric B backing. Quilt as desired.
7. Cut four Fabric C strips 2-1/4" x wof and seam together to create a long strip for binding. Bind the table runner.

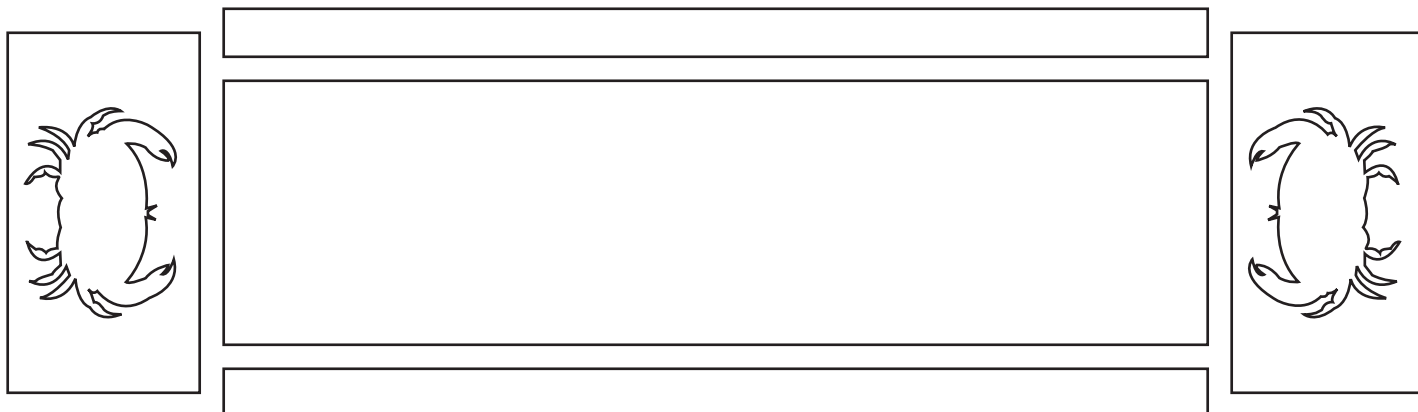


Table Runner Assembly

Crab Bay Tote Bag

Designed by Debby Kratovil

Finished Size: 16" x 19"

All seam allowances are 1/4". Please read all directions before beginning and press carefully after each step.

Fabric Requirements:

Red Version:

Fabric A: 1/2 yd 5510 Red

Fabric B: 1/2 yd 5511 Red

Fabric C: 1/2 yd 5512 Red

Fabric D: 1/2 yd 3504 Cayenne

1/2 yd heavyweight fusible interfacing

Two batting pieces: 20" x 22"

Olive Version:

Fabric A: 1/2 yd 5510 Blue

Fabric B: 1/2 yd 5511 Blue

Fabric C: 1/2 yd 5512 Olive

Fabric D: 1/2 yd 3504 Palm


1/2 yd heavyweight fusible interfacing

Two batting pieces: 20" x 22"


Cutting & Assembly:

1. Cut two rectangles 18" x 20" from Fabric A (for tote outside).
Cut two rectangles 18" x 20" from Fabric B (for tote lining).
Cut two rectangles 18" x 20" from Fabric C (for pockets).
2. Layer a Fabric B rectangle wrong side up, a batting piece and a Fabric A rectangle right side up, baste and quilt a simple pattern all over to secure the layers. Repeat for the remaining rectangles. One is the tote front and the other is the tote back.
3. Fold a Fabric C rectangle in half along the long edge and place along the bottom edge of the tote front, aligning the raw edges at the sides and bottom (this is the bag pocket). Repeat for the remaining Fabric C rectangle and the tote back. Secure in place with pins. See Tote Diagram 1.
4. Place tote front and tote back, right sides together and sew the tote bottom, using a 1/2" seam. See Tote Diagram 2. Press seam open.

Cutting & Assembly continued on next page.

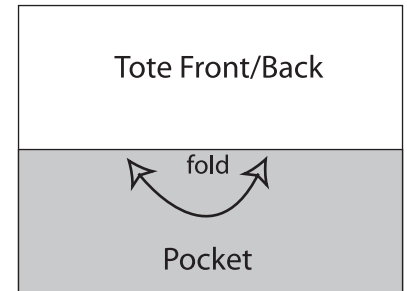


Tote Diagram 1

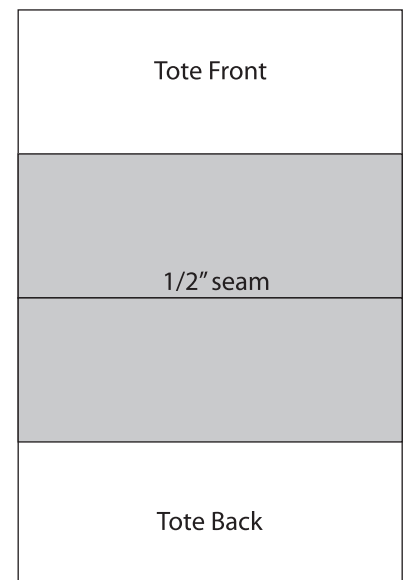


Tote Diagram 2

Tote Bag Cutting & Assembly (continued):


5. Cut 3 Fabric D strips 4" x wof and seam together into a long strip (for the tote handles). Press seams open. From the fusible interfacing cut enough 1-1/2" wide strips to equal the length of the Fabric D tote handle fabric (about 130"). Center the interfacing strips along the center of the tote handle strips (see Diagram 3) – leaving 1/2" at each end for seaming – and fuse in place along the entire length. Fold the raw edges of the tote strips into the center, tucking under 1/4" of one long side. Pin in place. Secure with a straight or zig zag stitch.
6. Join the short ends of the handle pieces into a loop. Fold the handle in half and half again, marking the divisions with pins.
7. Place the handles shown in Diagram 4, equally distributing the length. Measure in 5" from the bag side edge to the edge of the handle as shown. Stitch the handles to the tote front/back, beginning and ending about 2" from the top raw edge. This stitching automatically divides the pockets into thirds for the front and back.
8. To define the tote bottom corners, turn tote inside out and align side raw edges of tote front and back. At the bottom of the tote, fold the bottom corner up 1-1/2", resting inside the bag side seams. Stitch the bag sides using 1/2" seam (see Diagram 5).
9. Cut two 2-1/4" x wof strips of Fabric D for binding. Fold in half and bind to raw edge of tote. Finish stitching the bag handles where you left off at the tote top.



Tote Diagram

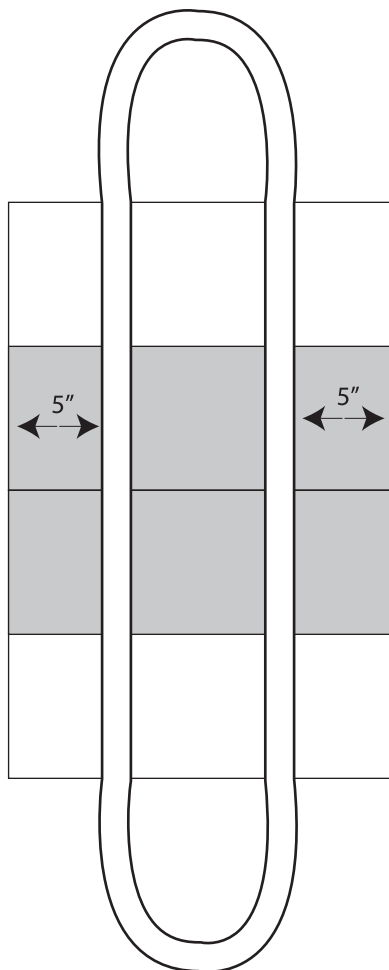

Tote Diagram 4

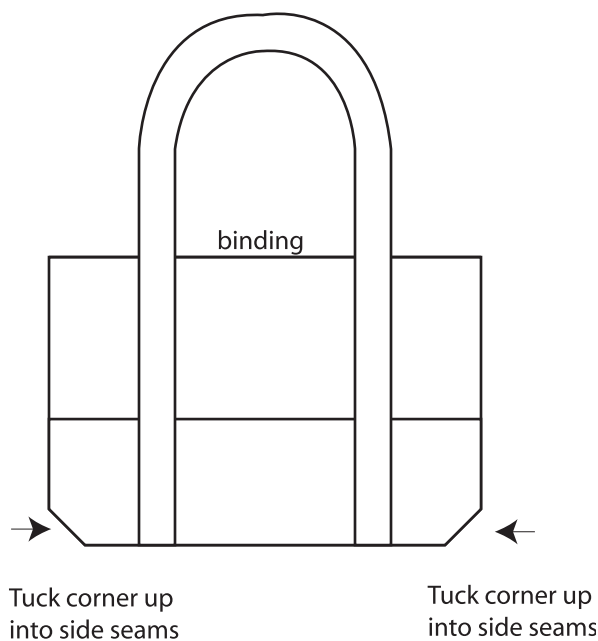

Tote Diagram 5

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.



© 2008 Blank Quilting • All rights reserved
2 Bridge Street, Suite 220, Irvington, NY 10533 • Toll Free: 888-442-5265 • Fax 914-478-4278 • www.BlankQuilting.com

BLK-2728-001